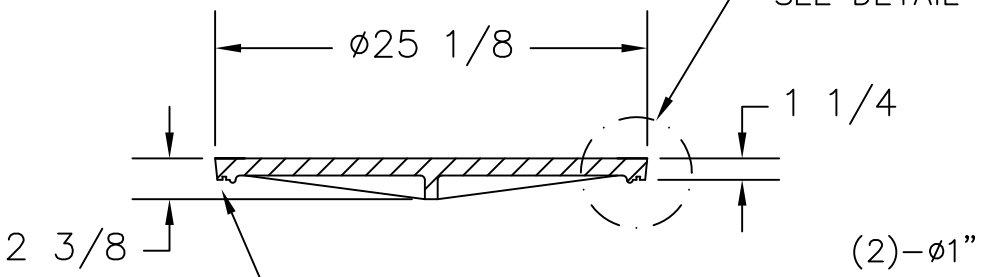

COVER

MACHINED SURFACES

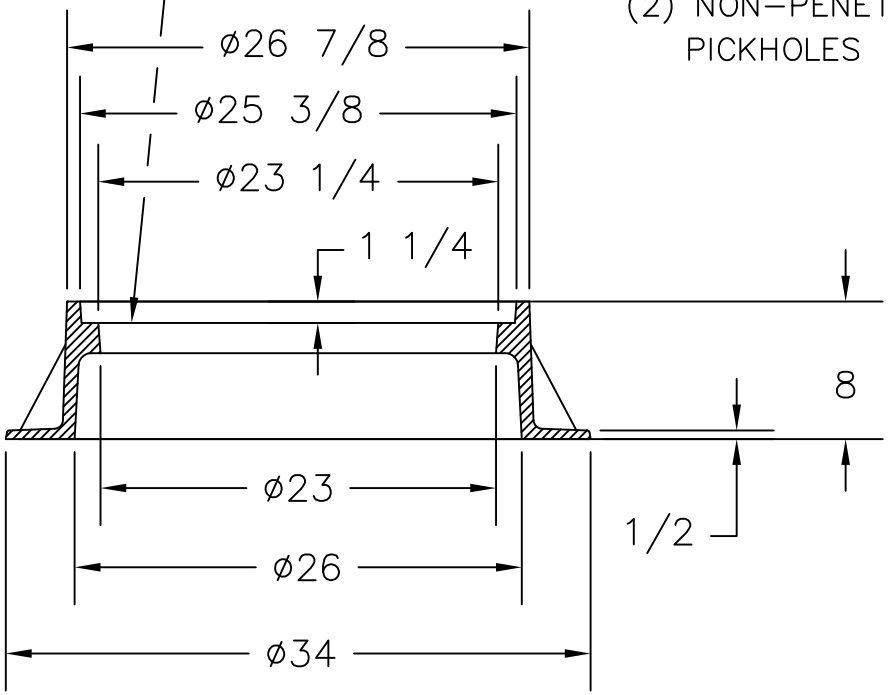

RING

(2)–3" LG.x 1" WIDE ANCHOR SLOT

(2)–ø1" ANCHOR HOLES

(2) NON–PENETRATING PICKHOLES

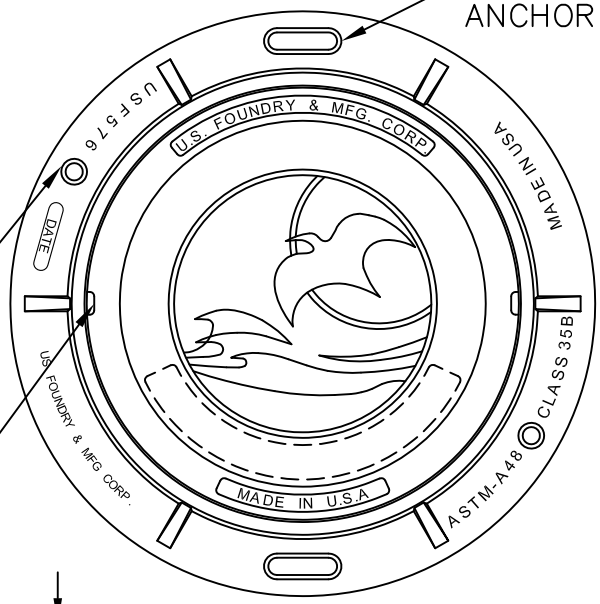

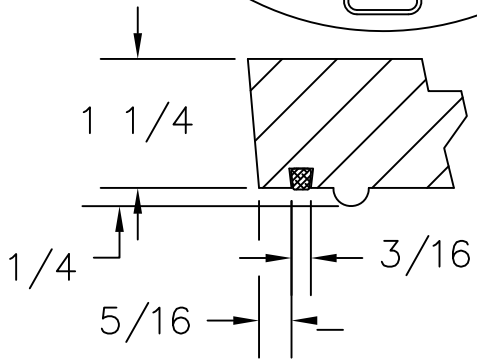

DOVETAIL GROOVE & GASKET

NOTE:

1– FINISH: BLACK ASPHALT PAINT

US FOUNDRY & MFG. CORP.
8351 NW 93rd Street, Medley, FL 33166-2025
ph: 1-800-432-9709; fax: 305-887-9429
www.usfoundry.com
© 2010 US Foundry & Mfg. Corp. All Rights Reserved

USF 576 RING & MR COVER ORS

(USF MR = USF BH Drag)

LOAD CLASSIFICATION: Heavy Duty				
MATERIAL: ASTM–A48 GRAY IRON CLASS35B				
Ring No:	8020191	WGHT:	225	SCALE: 1"=1"
Cover No:			145	DATE:
				DWN. BY: ULS
UNLESS OTHERWISE NOTED WEIGHT IS IN POUNDS AND APPROXIMATED				
REV:	DATE:	REV BY:		QUOTE#